



SPRING GREEN


GB-011

SWG 50

Southwest Green's number one selling 50 ounce lawn and grass turf designed with 1.75" pile height and textured thatch layer for the ultimate in appearance and texture.



877.260.7888
www.southwestgreens.com

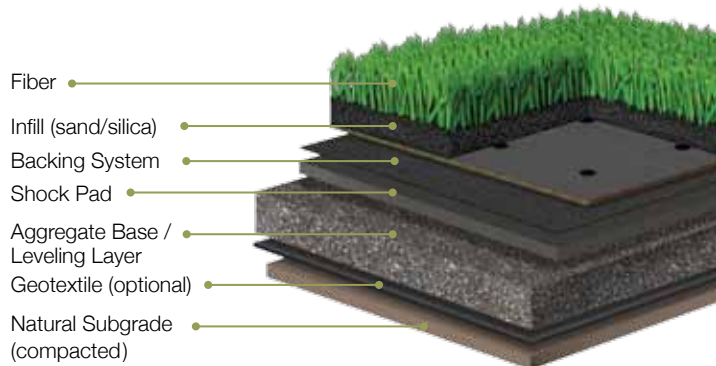

GB-011

SWG 50 Pro



	Property	Imperial Unit	Metric Unit	Description
PRODUCT PROPERTIES	Fiber Type			100% Polyethylene
	Fiber Mass	10800 denier	12000 dtex	6 ply PE MS PRO
		4500 denier	5000 dtex	6 ply MS PRO
	Tufted Pile Height*	1.75 in	44.45 mm	
	Color(s)			Spring Green / Green-Brown Thatch
	Tufting Gauge **	1/4		
	Primary Backing	7 oz/yd ²	237 g/m ²	Stabilized dual layered woven polypropylene
Secondary Backing	17 oz/yd ²	576 g/m ²	Urethane	
PERFORMANCE PROPERTIES	Tufted Face Weight	50.0 oz/yd ²	1695 g/m ²	ASTM D418
	Total Weight	74 oz/yd ²	2509 g/m ²	ASTM D418
PACKAGING	Item Number			GB-011
	Tufted Roll Width	15 ft	4.57 m	

10 YEAR WARRANTY

Southwest Greens International warrants to the original purchaser of the turf that for ten (10) years from the date of synthetic turf installation, the turf, when installed and maintained as recommended by the yarn and turf manufacturer, will retain at least 50% of its pile fiber. If any area or portion of the turf substantially changes, as distinguished from a change in texture, or if pile heights decrease 50% or more within ten years after its initial installation, Southwest Greens International will have all such areas or portions replaced with new turf of equivalent quality, excluding installation costs. Southwest Greens International also warrants that at the time of the initial turf installation, the synthetic turf will be free of manufacturing defects. Slight color changes will occur over the lifetime of this turf/carpet and is not considered an issue or basis for claim. All labor cost involved with the removal of the affected turf/carpet and reinstallation of the replacement will be the responsibility of the purchaser.

*For full terms, please see the 10 year warranty agreement

* Tufted pile height as standard. Pile height will draw down slightly during secondary backing process.

** Tufting gauge and stitch rate as manufactured standard. Values will change slightly during secondary backing process.

*** Standard roll lengths. Roll lengths may vary. Custom roll lengths and cuts are available upon request.

**** All specifications subject to manufacturing tolerances of +/-5%.